


DP-50/DP-100 Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-50	DP-100
Differential Voltage DC + AC peak	7KVp-p	7KVp-p
Bandwidth (-3dB)	50MHz	100MHz
Common Mode Voltage DC + AC peak	7KVp-p	7KVp-p
Common Mode Voltage RMS CAT II / CAT III	2.4KVrms	2.4KVrms
Attenuation (Switchable)	X100, X200, X500, X1000	X100, X200, X500, X1000
Input R (Each Input)	10M Ω \pm 2%	8M Ω \pm 2%
Input C (Each Input)	2.3PF	2.3 PF \pm 5%
Maximum Operating Voltage (DC+ AC peak)	\leq 700V at X100 \leq 1400V at X200 \leq 3500V at X500 \leq 7000V at X1000	\leq 700V at X100 \leq 1400V at X200 \leq 3500V at X500 \leq 7000V at X1000
Common Mode Rejection Ratio (CMRR)	60 Hz: > 80dB 100 Hz: > 60dB 1MHz: > 50dB	60 Hz: > 80dB 100 Hz: > 60dB 1MHz: > 50dB
Noise (Into 50 Ω Load)	\leq 1.0m Vrms	\leq 0.7m Vrms
Input Impedance (Between Input)	20M Ω // 1.2 PF	16M Ω // 1.2 PF
Accuracy (at 20~30 $^{\circ}$ C 70%RH after 20 minutes)	\leq \pm 2%	\leq \pm 2%
Maximum Output Voltage	\leq \pm 3.5V	\leq \pm 3.5V
Power Source	External 6V ~ 9V DC	External 6V ~ 9V DC
Over Range Indicate	○	○

ACCESSORIES:

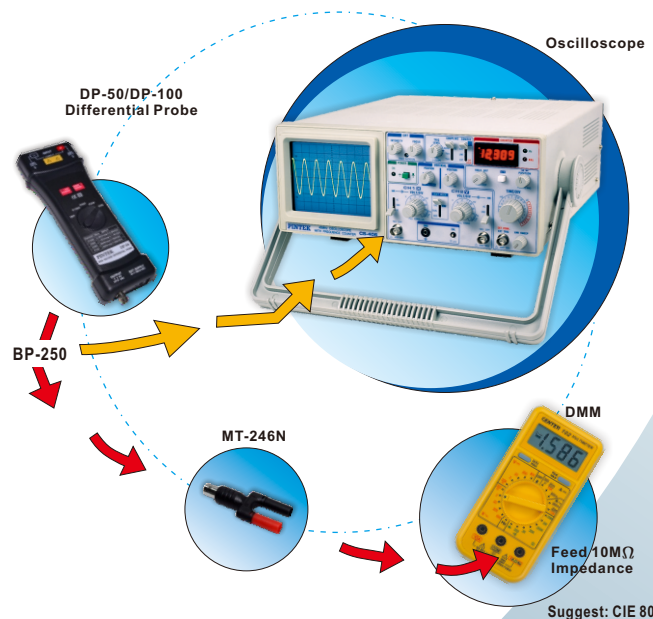

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Ping Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

http://www.pintek.com.tw

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT

